



Cylinder BL0T4*00H0

Disposable 25, 35 & 45kg/h cylinder for 3-phase immersed electrode humidifiers

Technical features

Single use (disposable) 3-phase steam cylinders suitable for:

- **humiSteam UE025*, UE035*, UE045* and UE090*** humidifiers (3-phase)
- Body: PPh plastic, class HB according to UL94
- Steam outlet: Ø 40mm
- Manifold connection: Ø 32mm
- Water volume: max 23 lt.
- Galvanised steel electrodes
- Electric connection: threaded M6; 10mm nuts and isolating caps supplied
- AFS sensor contacts
- Full body scale filter
- Max steam production: 45kg/h
- Max steam pressure: 0,002 MPa
- Water conductivity range: see table

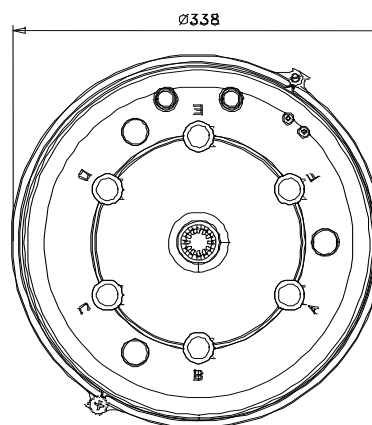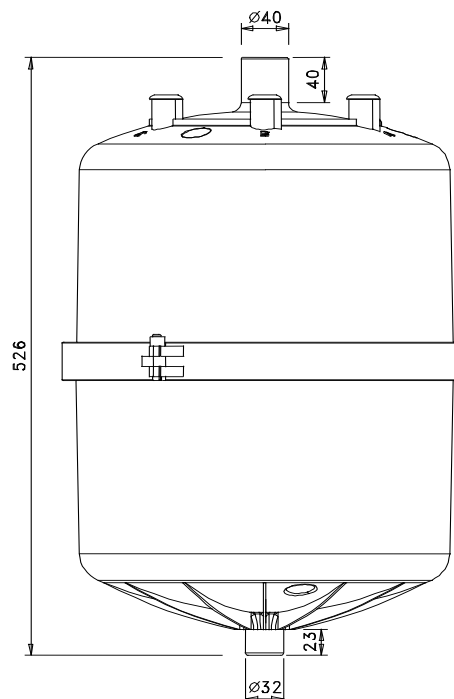

CAREL

Via dell'Industria, 11 – 35020 Brugine – Padova (Italy)
Tel. (+39) 049 97 16 611 – Fax (+39) 049 97 16 600
e-mail: carel@carel.com - www.carel.com

Approved water conductivity ranges @ 200-575VAC 3-phase:

Cylinder Model	VAC 3-phase	kg/h	µS/cm
BL0T4B00H0 BLCT4B00W0	200, 208, 230	25	125-350
BL0T4C00H0 BLCT4C00W0	200, 208, 230	25	350-1250
BL0T4B00H0 BLCT4B00W0	200, 208, 230	35	125-350
BL0T4B00H0 BLCT4B00W0	200, 208, 230	35	350-1250

BL0T4C00H0 BLCT4C00W0	400	25	125-350
BL0T4D00H0 BLCT4D00W0	400	25	350-1250
BL0T4C00H0 BLCT4C00W0	400	35	125-350
BL0T4D00H0 BLCT4D00W0	400	35	350-1250
BL0T4B00H0 BLCT4B00W0	400	45	125-350
BL0T4C00H0 BLCT4C00W0	400	45	350-1250

BL0T4D00H0 BLCT4D00W0	460	25	125-350
BL0T4D00H0 BLCT4D00W0	460	25	350-1250
BL0T4C00H0 BLCT4C00W0	460	35	125-350
BL0T4D00H0 BLCT4D00W0	460	35	350-1250
BL0T4C00H0 BLCT4C00W0	460	45	125-350
BL0T4D00H0 BLCT4D00W0	460	45	350-1250

BL0T4D00H0 BLCT4D00W0	575	25	125-350
BL0T4D00H0 BLCT4D00W0	575	25	350-1250
BL0T4D00H0 BLCT4D00W0	575	35	125-350
BL0T4D00H0 BLCT4D00W0	575	35	350-1250
BL0T4D00H0 BLCT4D00W0	575	45	125-350
BL0T4D00H0 BLCT4D00W0	575	45	350-1250

27.02.2004

CAREL

Via dell'Industria, 11 – 35020 Brugine – Padova (Italy)
Tel. (+39) 049 97 16 611 – Fax (+39) 049 97 16 600
e-mail: carel@carel.com - www.carel.com