


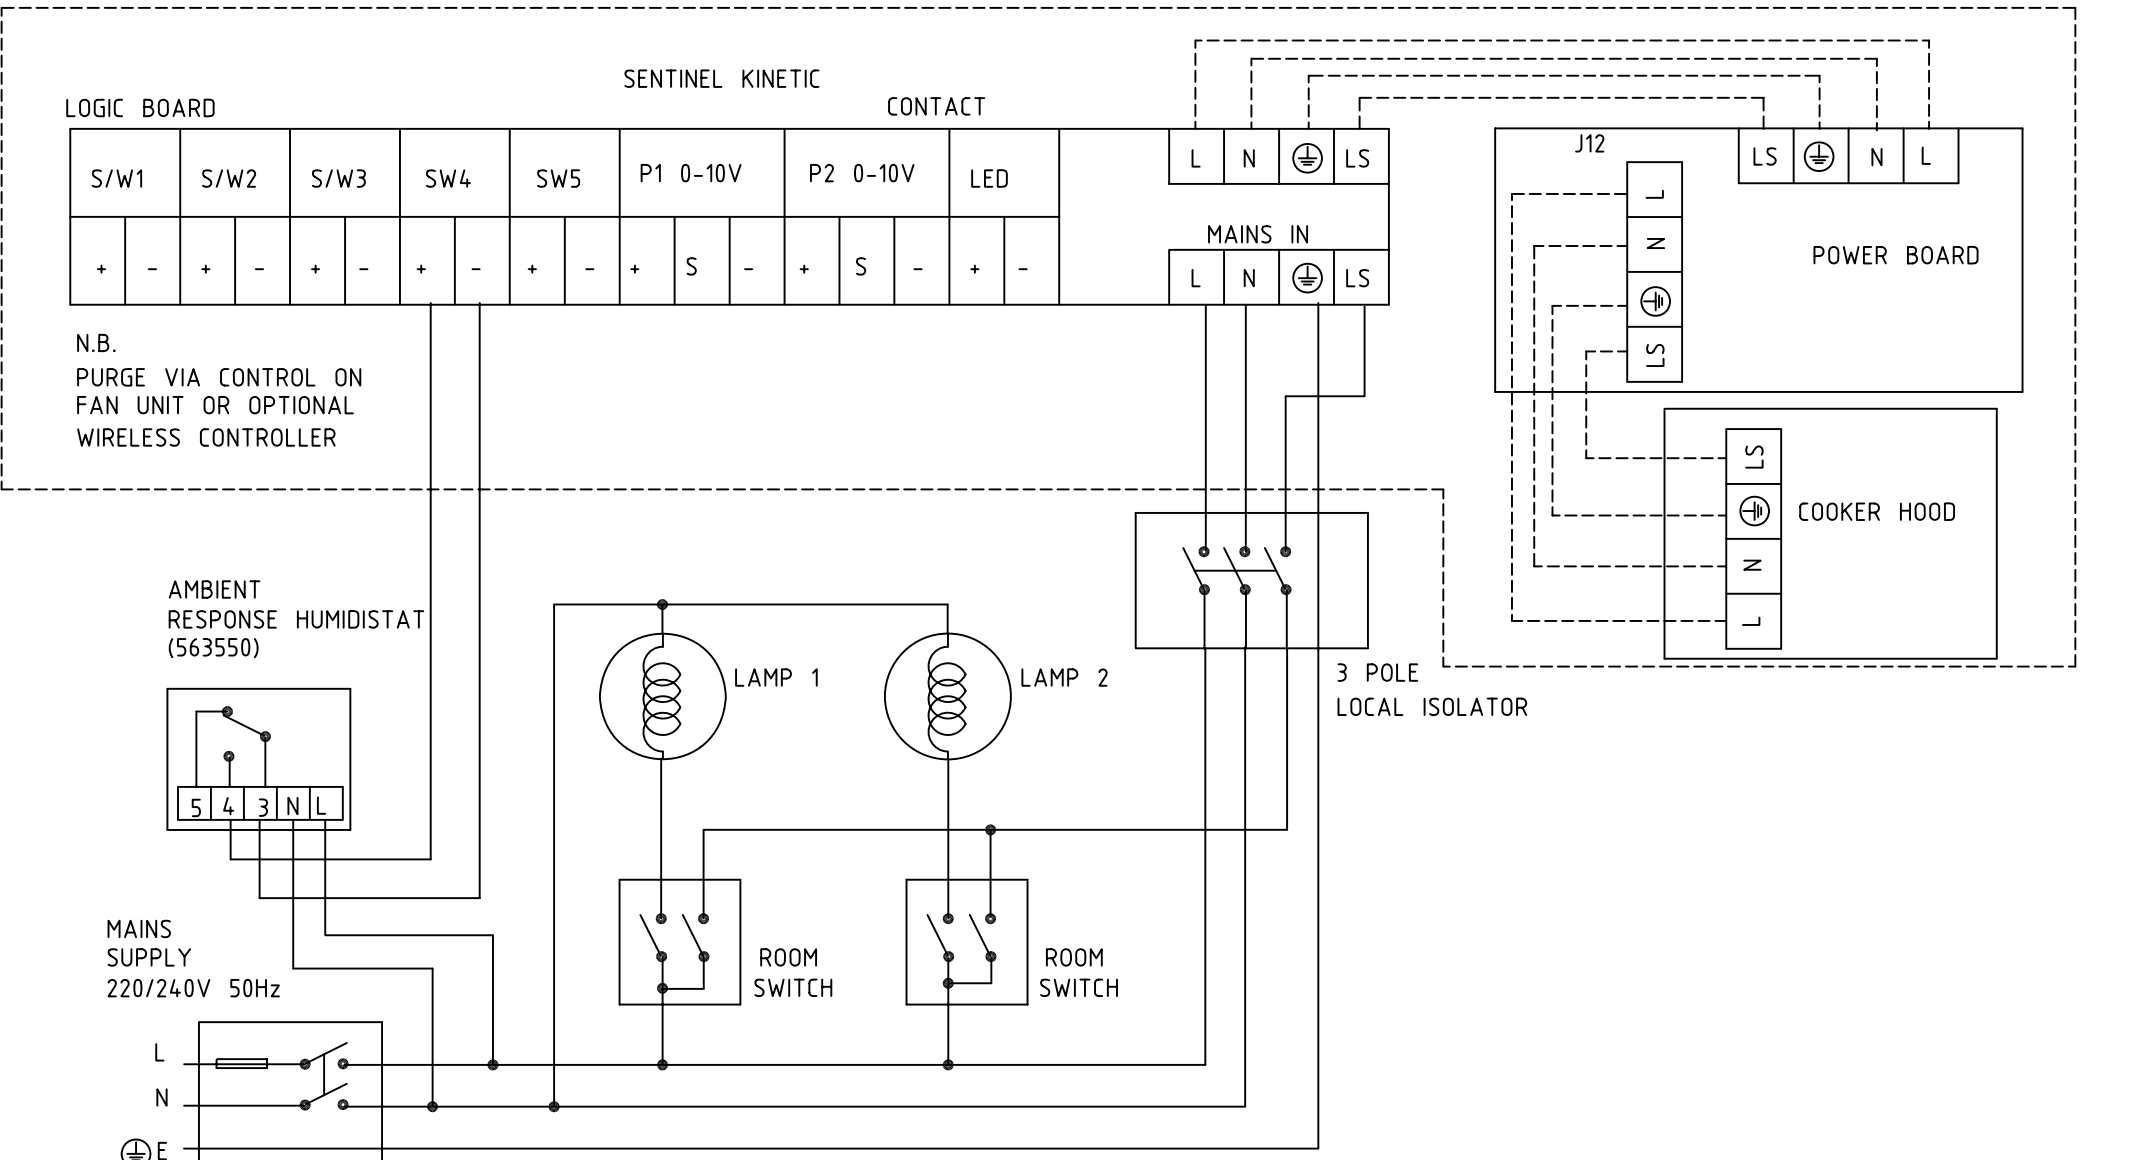

Note:-

- 1) Wiring to be in accordance with current IEE regulations
- 2) Refer also to the fitting and wiring instructions for the fans and controllers

Control description:-

Sentinel Kinetic switching from trickle to Boost by a light switch, or cooker hood switch, or Ambient Response.

ORIGINAL DRAWING SIZE A3	ALL DIMENSIONS IN MILLIMETRES TOLERANCES UNLESS OTHERWISE SPECIFIED:- ±0.5 ON NOMINAL DIMENSIONS ±0.2 ON 1 DECIMAL PLACE DIMENSIONS ±0.1 ON 2 DECIMAL PLACE DIMENSIONS ±0.1 ON HOLE DIAMETERS ETC ±1.0 DEGREE ON ANGULAR DIMENSIONS	This drawing/document is COPYRIGHT and the property of VENT-AXIA Ltd. It must not be copied (in whole or in part), used for manufacture or otherwise disclosed without prior written consent of the company. Any copies of this drawing/document made by any method must also include a copy of this legend. © VENT-AXIA Ltd. 2002	DRAWN	DGIBSON	DATE	7.4.2009	CHK'D		DATE		TITLE	
												Wiring Diagram Sentinel Kinetic two L.S. Humidistat, Built in C.H.
												PART No
												PROJECTION