



Plinth Heaters

Features & Benefits

- Ideal for where wall space is at a premium
- Fits neatly into plinths
- Finishes: W-White, B-Brown & S - Stainless Steel
- Optional thermostatic control
- 5-30 °C
- Can be used with remote switch VARSU 436494
- Two heat settings 1kW & 2kW

Vent-Axia Plinth Heaters are designed for use in kitchens and bedrooms. They fit neatly into most types of fitted furniture, fascias, display units and false walls.

When installed in a corner with an adjacent cupboard to the right, a distance of at least 150mm must be maintained between the right hand end of the heater and the front of the adjacent cupboard door.

Vent-Axia Plinth Heaters are supplied with 1.5m of 1.5mm² 3 core cable, terminating on the right hand side of the unit.

Models


Standard Models

Model	Stock Ref
VAPL2-S	459112
VAPL2-W	459113
VAPL2-B	459114

Thermostatic Models

Model	Stock Ref
VAPL2TC-S	459115
VAPL2TC-W	459116
VAPL2TC-B	459117

Dimensions (mm)

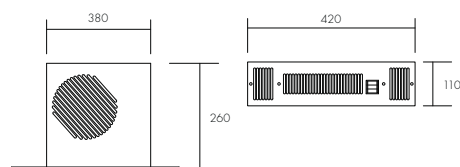

Cutout dimensions (mm) [W x H] 390 x 105
Weight 3kg

Warm Air Curtains

Features & Benefits

- Integral Switching for faster installation
- Three heat settings and fan only mode
- Models to suit single and double doorways
- Suitable for use as a high level fan heater

Vent-Axia Warmair Curtains provide a heated downflow of warm air in doorways of commercial premises such as shops, offices and schools.

The robust outer case is made from painted steel with an off white epoxy finish. Accommodating varying door widths is easily achieved by installing Warmair units 'Side by Side'.

Vent-Axia Warmair Curtains are supplied with 0.75m of 3 core cable, and mounting brackets.

Three Warmair models are available offering heat outputs & fan only :

Warmair 3 - 3 kW, 2 kW, 1 kW
Warmair 4.5 - 4.5 kW, 3 kW, 1.5 kW
Warmair 6 - 6kW, 4 kW, 2 kW

Models

Warmair Curtain Heaters

Manual and Automatic versions available.

Model	Stock Ref
Warmair 3	456343
Warmair 4.5	456344
Warmair 6	456345

Remote Switch

Remote Switch unit to control warm air units. Switch allows for fan only & 3 heat settings.

Model	Stock Ref
VARSU	436494

Specification

Model	Rating kW	Width mm	Height mm	Depth mm
Warmair 3	3.0	650	103	210
Warmair 4.5	4.5	650	103	210
Warmair 6	6.0	900	103	210

220-240V-50Hz. BEAB Approved.

Downflow Heater

Features & Benefits

- Stylish compact design
- 2kW Output
- Pull Cord operation
- Indication Light
- Double Insulated Class II
- IPX2 rated

The Vent-Axia Downflow Heater will deliver a welcoming warmth when its most needed in all room applications including bathrooms and living spaces.

The IPX2 rated Downflow Heater operates via a pull cord and is suitable for use within zone 2 of the bathroom. The Downflow Heater has a 2kW power loading and is designed to be permanently wall mounted for use with an AC electrical supply.

The Downflow Heater is fitted with a pre-set step down thermostat which regulates the room temperature and offers an energy saving. For maximum safety the heater includes a thermal cut-out feature to prevent overheating. With a indication light the Downflow Heater is simple to install.

Model

Downflow Heater

Model	Stock Ref
VADH2	455834

Specification

Model	Rating kW	W mm	H mm	D mm	Weight kg
VADH 2	2	229	242	109	1

220-240V-50Hz.