

Optimax Plus®

Storage Heater



Features & Benefits

- Perfect for offices and homes
- Optimised charge period offers 15% energy saving
- Reduced installation times
- Conveniently mounted controls
- Range of four heat outputs
- Colour RAL 9001
- IP20 rated
- BEAB approved

Comfort Heating

Vent-Axia Storage Heaters are often an economic alternative for new build or in existing properties, particularly where no other fuel source is available.

Vent-Axia Storage Heaters are simple to install, economical to run and virtually maintenance free. Ideal for use in living rooms, hallways and landings.

The range can be installed in bathrooms outside Zone 2, provided that the installation complies with IEE regulations.

Vent-Axia Storage Heaters offer comfortable warmth around the clock taking advantage of low-tariff electricity.

Ease of Installation

Simple to install wall fixings and quick assembly mean that new installations or replacement of existing units are completed with minimum disruption. The cable entry is located at the back of the unit on the bottom right hand side.

Manual models charge throughout the low-tariff period. Automatic models incorporate an ambient thermostat which optimises the charge to suit room conditions, typically saving an additional 15% in energy costs.

Vent-Axia Storage Heaters are slim, compact and aesthetically pleasing. Their attractive neutral finish blends in with furnishings.

The controls are conveniently positioned on top of the storage heater for ease of use. Once the optimum settings are selected, no further adjustment is necessary.

Models


Storage Heaters

Manual and Automatic versions available.

Model	Stock Ref
VASH 6	439355
VASH 12	439356
VASH 12A	439359
VASH 18	439357
VASH 18A	439360
VASH 24	439358
VASH 24A	439361

A=Automatic

Dimensions (mm)

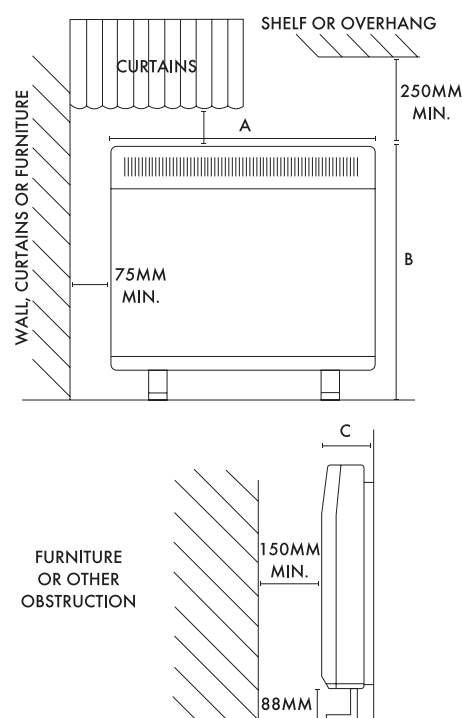

Specification

Stock Ref	Model	Input kW	Width (A) mm	Height (B) mm	Depth (C) mm	Weight kg	Number of Bricks
439355	VASH 6	0.85	332	700	170	41	4
439356 / 439359	VASH 12/12A	1.70	560	700	170	77	8
439357 / 439360	VASH18/18A	2.55	788	700	170	110	12
439358 / 439361	VASH 24/24A	3.40	1016	700	170	145	16

220-240V-50Hz. BEAB Approved.