

VA140/150

Axial Kitchen Fans



Features & Benefits

- VA140/150 Panel models
- 2 Year Guarantee
- Thermo electric shutters to prevent back drafts
- Meets current Building Regulations Approved Document F
- IP44 rated
- Suitable for wall, ceiling, panel and window mounting

Kitchen ventilation

VA140/150 Panel models are designed to alleviate the everyday problems that condensation and household odours may cause. Effectively extracts odours and moisture laden air from kitchens giving a healthy and fresh environment.

Building Regulations

Specifically sized to **meet the current Building Regulation requirements** for powered extract ventilation in domestic kitchens. Control facility fitted as standard. The VA140/150 range is fitted with internal louvres conforming to the latest international safety standards.

Please contact our Customer Service Department for exposed site application.

Models

VA140/150KP

Single speed kitchen extract fan with On/Off pullcord.

Stock Ref

140120

VA140/150KT

(Timer)

Single speed kitchen extract fan with adjustable overrun timer (3-30 minutes).

Stock Ref

140220

VA140/150KHP

(Humidistat)

Single speed humidity-controlled kitchen extract fan with full speed pullcord override. Humidity adjustment 62-82%RH.

Stock Ref

140320

VA140/150KHT

(Timer/Humidistat)

Humidity controlled kitchen extract fan with adjustable overrun timer (3-30 minutes). Humidity adjustment 62-82% RH.

Stock Ref

140420

VA140/150VS

Variable speed kitchen extract with a built in adjustable speed controller, which can reduce the speed to 40% of its maximum performance.

Stock Ref


458915

Dimensions (mm)

A	B	C	DØ	E	FØ	G	H
216	224	80	146	60	152	220	37


Weight 1.75kg

Panel

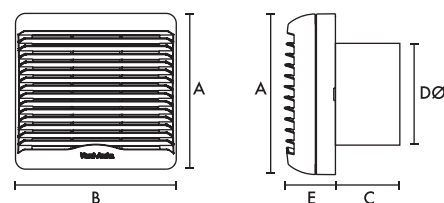

Panel fixing hole Ø 152mm

Wall



Wall fixing hole Ø 152mm


Wall Kit

Stock Ref:

140902 (White)

140903 (Brown)

Window



Window fixing hole Ø 160mm

Window Kit

Stock Ref

140901

Performance

Model	Shutter Actuator	Extract Performance FID				Sound dB(A) @ 3m
		m³/h	l/s	Watts		
VA140/150KP	Pullcord	245	68	18.8		36
VA140/150KT/KHP/KHT	Instant	245	68	18.8		36
VA140/150VS	Pullcord	100 low 245 boost	28 low 68 boost	18.8		36